

# Accessory - Boot Cover w/ sole

## Technical Data Sheet

**Product Code** DD605S

**Description** Disposable boot cover with elasticated opening and anti-skid PVC sole design


**Material**  
 Fabric: High performance external barrier film coated to non-woven fabric  
 Elastic: Neoprene Rubber (latex free)  
 Sole: PVC

**Color** Yellow

**Spec**



Item	Description	Length
A1	Cuff Relax	14 cm
	Cuff Stretch	28 cm
A2	Ankle Relax	17 cm
	Ankle Stretch	34 cm
B1	Height	42 cm
B2	Height to Ankle	16 cm
C	Sole Length	34 cm
	Sole Width	14 cm

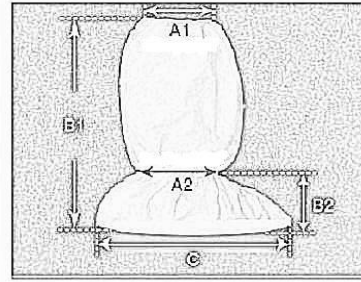


<b>CE Approval</b>	EN 13034:2005 +	Type PB [4], limited life, partial body protection against liquid chemicals
	EN 14126:2003	Type PB [4-B], limited life, partial body protection against infective agents

### Properties

FABRIC PHYSICAL PROPERTIES	TEST METHOD	RESULT	CLASS	FABRIC PHYSICAL PROPERTIES	TEST METHOD	RESULT	
Abrasion Resistance	EN 530	>100 cycles	Class 2	Azo Dyes	EN 14362-1	Pass	
Flex Cracking Resistance	ISO 7854	>1K cycles	Class 1	pH Value	ISO 3071	Pass	
Trapezoidal Tear Resist.	MD	>40N	Class 3	<b>FABRIC CHEMICAL PROPERTIES</b>			
	CD	>40N		<b>PENETRATION</b>	<b>REPELLENCY</b>		
Tensile Strength	MD	>100N	Class 2	Sulphuric acid 30%	Class 3	Class 3	
	CD	>60N		Sodium Hydroxide 10%	Class 3	Class 3	
Puncture Resistance	EN 863	>5N	Class 1	o-Xylene	Class 3	Class 2	
Seam Strength	ISO 13935-2	>75N	Class 3	Butan-1-ol	Class 3	Class 2	
<b>CHEMICAL PERMEATION*</b>		<b>TEST METHOD</b>		<b>FABRIC PERFORMANCE</b>		<b>SEAM TAPE PERFORMANCE</b>	
10% Formaldehyde		EN 374-3		>480 min	Class 6	>480 min	Class 6
Methanol		EN 374-3		>480 min	Class 6	13 min	Class 1
98% Sulphuric acid		EN 374-3		>480 min	Class 6	>480 min	Class 6

Note\*: Please contact your local distributor for the full list of tested chemicals and the results of resistance against various chemicals

### Seam Type



#### Stitched with Tape Seam

Stitch seam with chemical barrier tape for a higher protection level to particulate and liquid splashes

**Packing** 100 pairs per box

### Storage and Disposal

- Store in dry, clean conditions in original packaging.
- Store away from direct sunlight, sources of high temperature, and solvent vapors.
- Store within the temperature range -20°C to +25°C (-4°F to +68°F) and with relative humidity below 80%.
- Shelf life is 60 months from date of manufacture when stored as stated above.
- Replace garments if damaged, heavily contaminated or in accordance with local work practice.
- Handle and dispose of contaminated garments with care and in accordance with national regulations.

Do not wash

Do not clean dry Flammable

Do not iron

Do not tumble dry